

## Auto PAC 300-FA

### Reliable automation at an affordable price


The Auto PAC 300-FA (Fully Automatic) strapper is a reliable, fully automatic strapping machine designed to automate your strapping operation at an affordable price. Using cost effective 3/8" (9mm) or 1/2" (12mm) strap, this unit combines the proven technology of the Auto PAC 300 head with fully automatic features to give you a strapper that's dependable for even the toughest applications. The Auto PAC 300 is loaded with an impressive list of features, and it's backed by one of the best warranties in the industry... 99% parts availability within 24 hours and unlimited, free telephone support for the life of the machine. If you are looking for a fully automatic strapper for 3/8" or 1/2" strap, you can't get a better value than the Auto PAC 300-FA. Standard features on the Auto PAC 300-FA include:

- **Adjustable Photocell Activation**  
Photocells automatically place straps at precise locations on your package.
- **Simplified Control Panel**  
Strap Selection (0, 1, 2 or 3), Tension, Conveyor Speed and Compression are all controlled from a conveniently located control panel. Place 0, 1, 2 or 3 straps by a selector switch on the control panel.
- **Variable Conveyor Speed**  
Conveyor speed is easily adjusted from the control panel.
- **Auto Feeding**  
Loading strap is automatic, activated by pressing the start button.
- **Jam Free Automatic Re-feeding**  
In the event of any feeding problems, the strap is automatically re-fed into the strapping head, and the Auto PAC 300-FA returns to the ready position.



SIMPLIFIED CONTROL PANEL

EASY ACCESS CONTROL UNIT

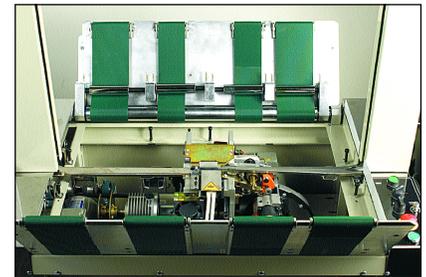

### TECHNICAL SPECIFICATIONS

Dimensions: 62.2"W x 27.8"D x 60.6"H without compression  
62.2"W x 27.8"D x 90.5"H with compression

Weight: 857 lbs. without compression  
886 lbs. with compression

Table Height: 32.4" belt  
31.8" roller

Conveyor Speed: 59 – 137 feet per minute

Tension Range: 15 – 154 lbs.

Speed: 20 straps per minute auto mode  
29 straps per minute hand mode  
17 – 18 bundles per minute

Package Size: Minimum- 9.8"W x 9.8"L x 1"H  
15.7"W x 15.7"L x 15.7"H auto mode

Maximum- Depends on arch size  
(See chart for available sizes)

Package Weight: Maximum- 77 lbs. belt  
176 lbs. roller

Strap Size: 3/8" (9mm) – 1/2" (12mm)

Core Size: 8x8, 9x8

Power Requirements: 220V, 3-phase 50/60 Hz, 7 amps  
380/400/415V available as an option

Air Requirements: 87 PSI (for compression option only)



ADJUSTABLE PHOTO EYES FOR PRECISE STRAP PLACEMENT

### AVAILABLE ARCH SIZES

Width \ Height	33.5" 850mm	41.3" 1050mm	49.2" 1250mm
15.7" 400mm	✓	✓	✓
23.6" 600mm	Std.	✓	✓
31.5" 800mm	✓	✓	✓
39.4" 1000mm	✓	✓	✓

VARIABLE SPEED CONVEYOR TABLE

