

EASTEY SEALER SPECIFICATIONS

EM-T SERIES: MANUAL L-Sealer with powered takeaway conveyor, magnet clamping, cycle timing, pin perf, film clamps, base and spare parts.

MODEL		SEAL DIMENSIONS FRONT x SIDE			MACHINE DIMENSIONS W x H x L				POWER REQUIREMENTS			CRATED WEIGHT SHP WT.		
									VOLTS	PHASE	AMPS			
EM16T	(in)	16	x	20	34	x	44	x	63	220	1	20	500lbs	700lbs
	(cm)	40.64	x	50.80	86.36	x	111.76	x	160.02	220	1	20	228kg	319kg
EM28T	(in)	28	x	20	34	x	44	x	84	220	1	20	550lbs	750lbs
	(cm)	71.12	x	50.80	86.36	x	111.76	x	213.36	220	1	20	250kg	341kg
EM40T	(in)	40	x	20	34	x	44	x	106	220	1	20	650lbs	850lbs
	(cm)	101.60	x	50.80	86.36	x	111.76	x	269.24	220	1	20	296kg	387kg
EM50T	(in)	50	x	20	34	x	44	x	126	220	1	30	750lbs	950kg
	(cm)	127.00	x	50.80	86.36	x	111.76	x	320.04	220	1	30	341kg	432kg
EM70T	(in)	70	x	20	34	x	44	x	167	220	1	30	850lbs	1050lbs
	(cm)	177.80	x	50.80	86.36	x	111.76	x	424.18	220	1	30	387kg	478kg
EM3040T	(in)	40	x	30	43	x	44	x	106	220	1	20	1000lbs	1300lbs
	(cm)	101.60	x	76.20	109.22	x	111.76	x	269.24	220	1	20	455kg	591kg
EM3050T	(in)	50	x	30	43	x	44	x	126	220	1	30	1100 lbs	1400kg
	(cm)	127.00	x	76.20	109.22	x	111.76	x	320.04	220	1	30	500kg	637kg
EM3070T	(in)	70	x	30	43	x	44	x	167	220	1	30	1200lbs	1500lbs
	(cm)	177.80	x	76.20	109.22	x	111.76	x	424.18	220	1	30	546kg	682kg
EM4040T*	(in)	40	x	40	53	x	44	x	106	220	1	30	1400lbs	1700lbs
	(cm)	101.60	x	101.60	134.62	x	111.76	x	269.24	220	1	30	637kg	774kg
EM4050T*	(in)	50	x	40	53	x	44	x	126	220	1	30	1500lbs	1900lbs
	(cm)	127.00	x	101.60	134.62	x	111.76	x	320.40	220	1	30	683kg	864.50kg
EM4070T*	(in)	70	x	40	53	x	44	x	167	220	1	30	1700lbs	2100lbs
	(cm)	177.80	x	101.60	134.62	x	111.76	x	424.18	220	1	30	774kg	956kg

*Powered film unwind included

DEALER IMPRINT

EASTEY ENTERPRISES, INC.
21480 147TH AVE. NO., ROGERS, MN 55374
PHONE: 763/428-4846
FAX: 763/428-8361
TOLL FREE: 800/835-9344
www.eastey.com eastey@eastey.com

Copyright © 2005 Eastey Enterprises, Inc., All Right Reserved

(Rev. 6/07)

BUILT RIGHT - PRICED RIGHT



Shrink Packaging Equipment for the Shrinking World

SEALERS w/hot wire seal systems




EM16T

Shrink Packaging Equipment for the Shrinking World

SEAL SIZES in inches

16, 28, 40, 50, 70 x 20
40, 50, 70 x 30
40, 50, 70 x 40


80 & 100 x 20, 30, & 40 available in hot knife only - see hot knife (DouSeal®) brochure

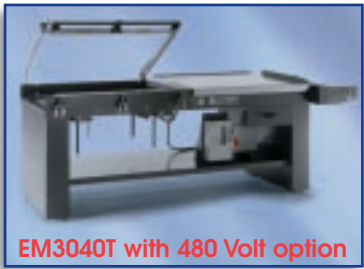

EM3040T with 480 Volt option



EM4040T with power unwind

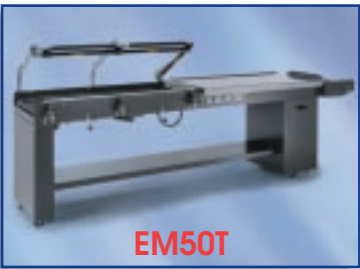


EM50T

EM-T-SERIES: Manual L-Sealer with powered takeaway conveyor, magnet clamping, automatic cycle timing, pin perf, seal sizes up to 30" x 40" series includes seal clamps, base, and spare parts kit.

Maximum Film Widths:
• 20" side seal sealers - 24" • 30" side seal sealers - 34" • 40" side seal sealers - 44"
Maximum Roll O.D.: 12", 10" If sealer has a powered film unwind.



BUILT RIGHT . . . PRICED RIGHT

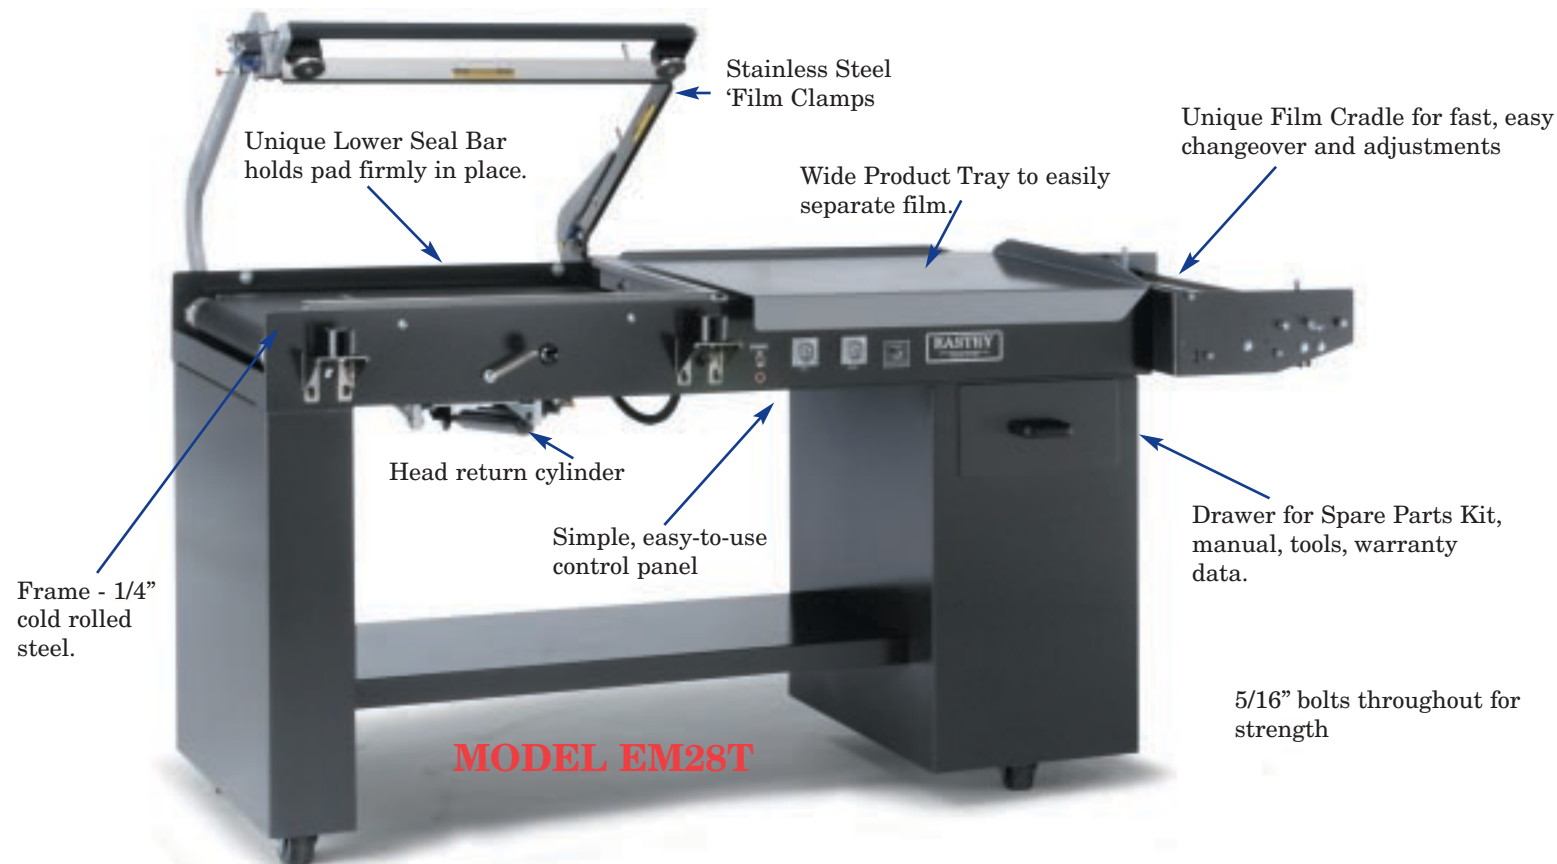

STANDARD FEATURES

Standard features common to all EASTEY Sealers (except Econo Series Sealers) include; all welded frame of 1/4" cold rolled steel...5/16th bolts holes throughout for strength and commonality of parts; locking 3" swivel casters; Parts Drawer in base leg with Spare Parts Kit and Instruction Manual. Frame is pre-drilled for addition of optional components when required. Seal Head Casting equipped with Head Return Cylinder. Wiring is numbered and color coded for easy repair and replacement. Wide Product Tray with film separation lip for more work room and

operating ease. LEFT HAND MODELS AVAILABLE IN ALL SERIES (except Econos). Optional features include Power Film Unwind and inverting Head, and DuoSeal® Continuously Heated Seal Bar. **Spare Parts Kit:** All hot wire sealers (except Econos) supplied with Operation and Parts Manual; 50ft. of .036 half hard nichrome seal wire(19 gauge), 10 yds. x 3/4" x 10 mil teflon tape, 10 yds x 1/2" x 10 mil teflon tape, 2 heat sinks, 1 knurled nut, 4' x 3/4" wide x 1/4" thick sponge rubber, two 1 Amp fuses.

You'll get more with EASTEY

- Rugged, long life design
- Unique Film Cradle for quick, easy film adjustment and changeover.
- Positive actuation of Hole Punch and Seal System
- Smooth Seal Head Return with Return Cylinder
- Food Application Finish
- White Takeaway Belt

- USDA Approved
- Stainless Steel Models Available
- Double Film Rack
- Film Inverter
- Power Film Unwind

- Special Product Guides
- Special Products and Projects
- Custom Product Trays
- Electric Hole Punch or Pin Perf
- Easy to operate, maintain and service.
- Heavy-duty Base with tool and parts Drawer

**CALL US!
TODAY**

EXPANDABLE, TOO

EASTEY L-Bar Sealer frames are pre-drilled to accept options you may want to add to your machine later, saving installation time and money. For example, you buy a M-Series. Order the Conveyor kit and install it easily within hours. No modifications necessary. Kits are sold at low prices compared to the cost of a new machine.

CRADLE STYLE FILM RACK



Simple positioning of the film roll provides quick, easy film adjustments and product changeover.

PIN PERF



Pin Perf or Electric Hole Punch provides air evacuation. No extra charge if ordered as original equipment.

EXCITING OPTIONS

HOT KNIFE SEAL SYSTEM DUOSEAL® BY REYNOLDS



Hot Knife system features a continuously heated seal bar and is available on most Easteey Sealers. See **HOT KNIFE DUOSEAL® BY REYNOLDS EASTEY brochure.**

POWER FILM UNWIND




Power assisted rollers accommodate 2 rolls of film. Easy to follow film threading diagram shows how to guide film through the unwind. Effortless operation reduces operator fatigue and increases product output.

INVERTING HEAD



Inverting head allows the film to come off the back of machine. This pre-opens the film and minimizes operator effort which in turn increases output.

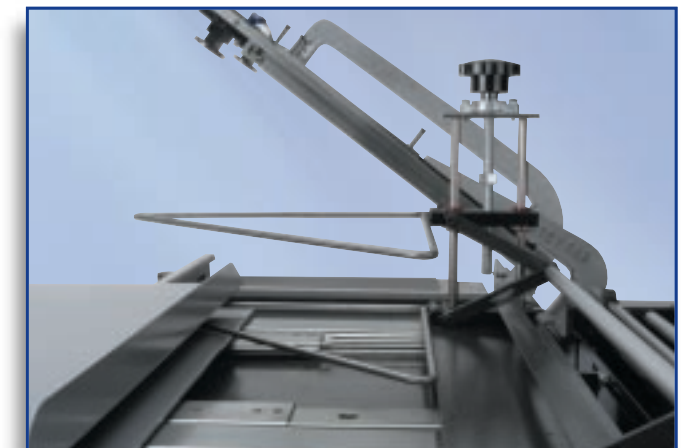

Unique design detaches the product tray from the inverting head, which simplifies film threading to a push of the film towards the seal area. The product tray is locked back in position and the pre-opened film is ready to accept product.