

 **Sealed Air**

# NewAir I.B.<sup>®</sup> Express

Inflatable Cushioning System

## The Versatile, Inflatable Cushioning System for Any Packaging Operation



*Roll Winder accessory sold separately.*

# The NewAir I.B.® Express System

Patented Technology Ensures Fast, Reliable Inflatable Cushioning

## Tiny Footprint, Enormous Production

The NewAir I.B.® Express inflatable cushioning system from Sealed Air quickly produces inflatable cushioning, in 12" and 24" film widths, at speeds up to 65 linear feet per minute — fast enough to keep up with the most demanding packaging operations. The small footprint and variety of batching, delivery and converting options make the NewAir I.B.® Express system the perfect fit in almost any packaging environment.



## The Right Material for your Application

With the NewAir I.B.® Express system, you can customize the cushioning output. Choose between two different film widths, 12" and 24", and a variety of regular and premium film options.



## Save Valuable Floor Space

The NewAir I.B.® Express has a compact footprint (less than 6 sq. ft.) that works well in cellular packaging environments. The compact design fits comfortably on a tabletop, or can be mounted on a table-side stand. A single film roll can equal 5,000 square feet of ½ inch Barrier Bubble® material, creating on-demand packaging that saves storage space and handling.



## System Accessories For Every Configuration

The NewAir I.B.® Express is supported by a large array of system accessories, making it flexible enough to be used in any and every packaging operation.

### SYSTEM STAND AND ROLL WINDER

With the optional Roll Winder attachment, the NewAir I.B.® Express system can create a 36" roll of material in under three minutes, for decentralized packaging environments.




### INSTASHEETER™ CONVERTING SYSTEM

At the touch of a footswitch, the Instasheet™ Converting System cuts custom sheets of NewAir I.B.® material that provide excellent cushioning or blocking and bracing.



### JETSTREAM™ DELIVERY SYSTEM

The JetStream Overhead Delivery System allows one NewAir I.B.® Express system to feed packaging stations, using a patented air-driven process. Ideal for high-volume, high-throughput environments.

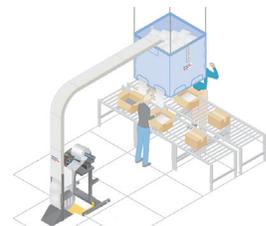

### FOOT PEDAL

An optional foot pedal allows the operator to easily control the flow of material.



## Specifications

### Electrical:


100-120 VAC, 60 Hz,  
3 Amp, Single Phase

### Weight (without roll):

81 lbs.  
36.7 kg.

### Overall Size (L x W x H):

2'-5" x 2'-2" x 1'-7" /  
.74m x .66m x .48m

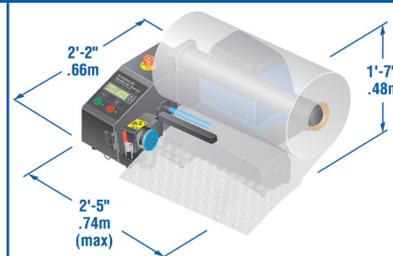

Distributed By:



Protective Packaging  
10 Old Sherman Turnpike  
Danbury, CT 06810-4173  
203-791-3500 Fax: 203-791-3618  
www.newairib.com

**Our Products Protect Your Products®**

Corporate Office: Sealed Air Corporation (US)  
200 Riverfront Boulevard, Elmwood Park, NJ 07407 www.sealedair.com  
© Reg. U.S. Pat. and TM Off. © Sealed Air Corporation (US) 2009. All rights reserved.  
The "9 Dot Logo" and "Sealed Air" are registered trademarks of Sealed Air Corporation (US).  
Printed in the U.S.A. D-193 09/09